

**Topic / Issue:** Topex Mobilink GSM and Epygi Quadro range

**Written By:** Steven Sismanis

Certain Quadro PBX models ( possibly only affecting earlier models prior to 2008 ) have a different FXO DSP module that makes them incompatible with the standard Topex Mobilink mode.

This can be corrected by disabling the Asymmetrical Ring Voltage on the FXS port of the Mobilink via the OAM application.

The OAM can be downloaded from here:


[http://www.alloy.com.au/web\\_download/Telephony/Topex/Mobilink/](http://www.alloy.com.au/web_download/Telephony/Topex/Mobilink/)

Passwords for OAM are as follows:

Connect to Modify - "gsm"

Connect to View - "topex"

See screenshot below.

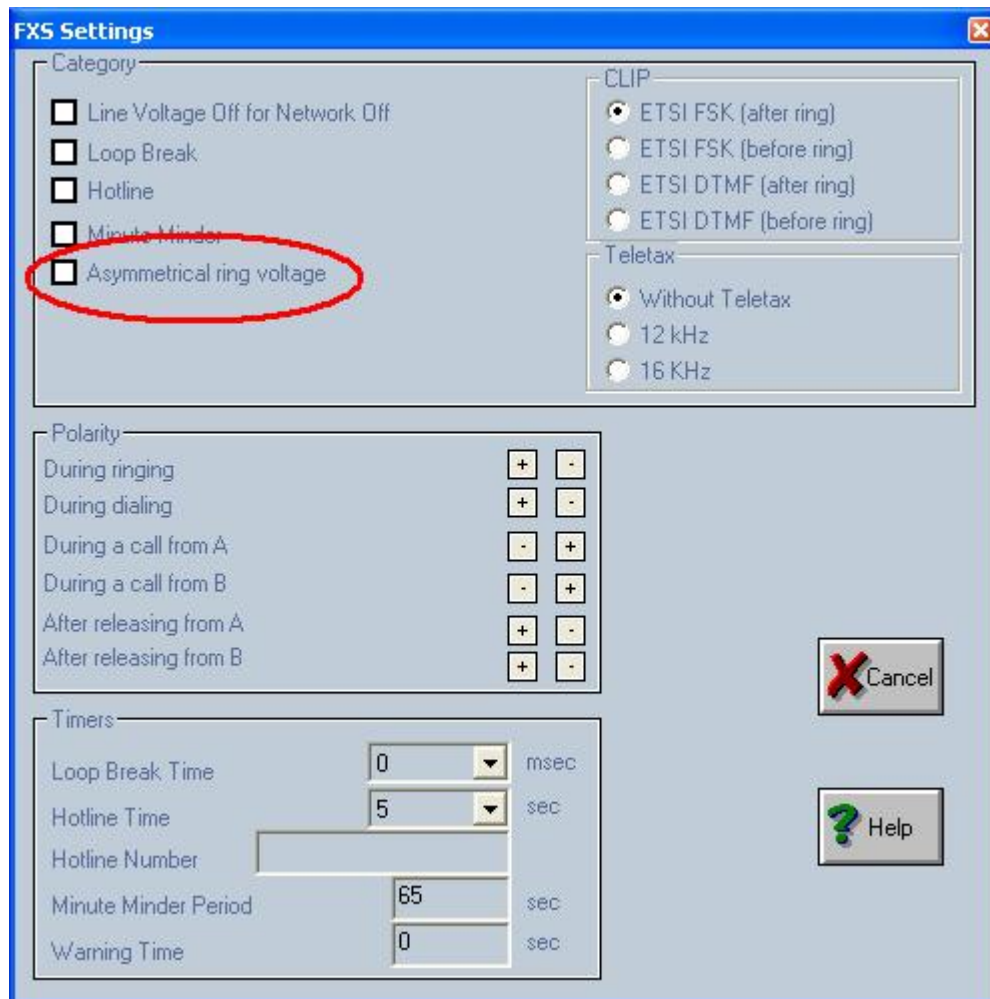

This procedure can also be performed manually by connecting an analogue phone to the FXS port and following the procedure outlined in pages 20 & 22 of the manual (Code 500).